

# REYNOLDS

®

**16 cu. Yard(12,2m<sup>3</sup>) Ejector. SCRAPER model 16E14**



## 14 ft. (4.26m) wide cut for LASER FINISHING

### **"Ejector Scraper"**

for LASER Land forming, precision leveling large fields, and building sites with your Ag tractors from 300 to 400 HP.

### **"Synchronized ejector"**

Cylinders, priority apron opening system, replaceable flat ejector guide rails, and steel rollers. Patented SDS® system.

### **"Hydraulic System"**

Manifold with integral valves control all scraper functions. Flare type fittings to reduce leaks. Covers protect lines. Easy service access.

***"America's Preferred Scraper"***

# REYNOLDS

**REYNOLDS INTERNATIONAL EQUIPMENT, L.P.**  
P.O. Box 550, McAllen, Texas 78505-0550 USA  
[www.reynoldsinternational.com](http://www.reynoldsinternational.com)

# REYNOLDS

## LASER Ejector. **SCRAPER** wide cut model 16E14

Specifications subject to  
change without notice

### Specifications

#### ■ capacities

16 yd<sup>3</sup> (12.2 m<sup>3</sup>) heaped

11.5 yd<sup>3</sup> (8.8 m<sup>3</sup>) struck


#### ■ width

168" (4.26 m) cutting

185" (4.70 m) transp.

#### ■ wheels

(4) 23.5X25

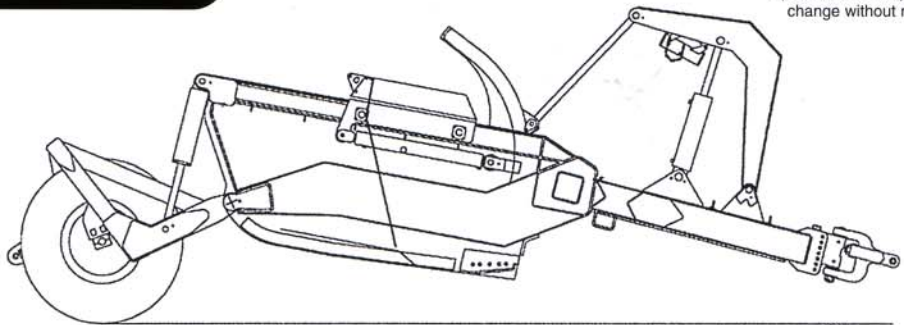

#### ■ shipping weight est.

23,400 lb (10,614 kg)



### Features

Unitized multi-function hydraulic block.

Ejector roller bearings.

Tandem quick hitch and hydraulics.

Cylinder safety stops.

Adjustable yoke hitch.

Reversible heat treated alloy blades (3-pc).

Wear resistant corner bits.

Height adjustable axle mounts.

Heavy duty roller bearing hubs.

Laser bracket.

#### "Quick Hitch"



#### "Hydraulic Manifold"

### Options

Tractor drawbars.

Skid shoes

Center frost bit



### Tractor requirements

#### ■ hydraulics

two double acting circuits

optimum 25 GPM (100 l/min)

at 2500 PSI (175 bar)

#### ■ engine HP range

300-400 HP



REYNOLDS INTERNATIONAL EQUIPMENT, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082, E mail: info@reynoldsinternational.com