

REYNOLDS®

High performance **EJECTOR Scraper** model 17E10.5



**17 cubic yard (13 m³)
for your construction needs**

fast loading

- Three piece, reversible cutting blade. Combination serrated/plain center **STINGER** section. Synchronized Displacement System (SDS). High flow rate hydraulic connections.

very reliable

- One multi-function control valve block. Plated steel tubing with flare fittings. Protective side covers for steel tubing.

easy to move

- Road transport width under 12 feet. SAFETY blocks for hydraulic cylinders. High flotation 20.5-25 tires. Quick hitch compatible yoke assembly.

“America’s Preferred Scraper”

REYNOLDS®

REYNOLDS INTERNATIONAL EQUIPMENT, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com


REYNOLDS®

MODEL 17E10.5 17 yd³ (13 m³) **EJECTOR Scraper**

Specifications subject to
Change without notice


Specifications

- capacities 17 yd³ (13,0 m³) heaped
12.07 yd³ (9,2 m³) struck
- bucket dimensions
W 126" (3,20m), L 96" (2,43m),
H 55" (1,39m)
- transport dimensions
W 143" (3,64m), L 266" (6,75m),
H 81" (2,05m), Clearance 20" (0.50m)
- tires (4) 20.5 x 25
- shipping weight est. 23,600 lb (10,727 kg)

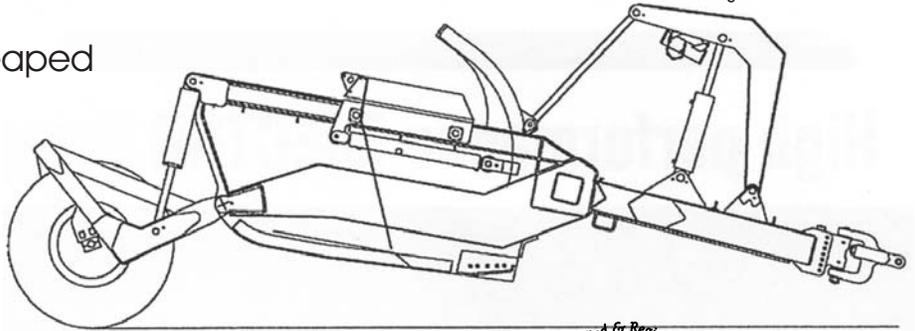

Features

- Laser receiver mount bracket.
- Multi-Function hydraulic valve block.
- Greasable pins, roller bearings.
- Tandem hydraulics and hitch.
- Safety blocks for hydraulic cylinders.
- Height adjustable yoke hitch.
- Rear quick hitch.
- Rear lights.

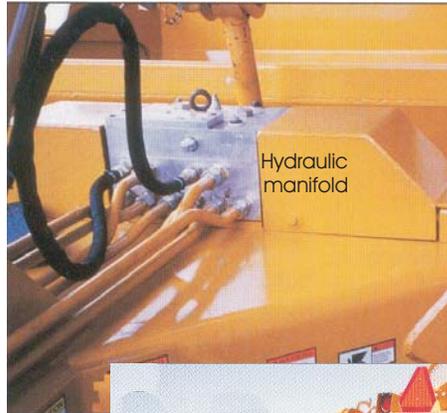

Options

Tractor drawbar.

Tractor requirements

- **hydraulics**
two double acting
optimum 25 GPM (100 l/min)
at 2500 PSI (175 bar)
- **engine HP range**
350-450 HP



REYNOLDS INTERNATIONAL EQUIPMENT, L.P. P.O. Box 550, McAllen, Texas 78505-0550 USA
Tel. (956) 687-7500 Fax (956) 687-3082, E mail: info@reynoldsinternational.com