

REYNOLDS®

model 8C CARRY-ALL Scraper

7 ft (2.13 m) cut width

8 yd³ (6.1 m³) heaped capacity

5.7 yd³ (4.3 m³) struck capacity



land forming with agricultural tractors:

fast loading

■ Low profile bucket with bolted on cutting blade and center frost bit reduce fuel consumption and tractor HP requirements.

laser leveling

■ Innovative hydraulic controls and heavy duty cylinders are designed for laser precision cuts and fast spreading operation.

economical

■ Self-sharpening, high carbon steel reversible cutting blades and wear resistant bolt-on side bits are readily available.

REYNOLDS®

REYNOLDS INTERNATIONAL, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA

www.reynoldsinternational.com

REYNOLDS®

MODEL 8 C 8 yd³ CARRY-ALL SCRAPER

Specifications

■ **capacities** 8 yd³ (6.1 m³) heaped

5.7 yd³ (4.3 m³) struck

■ **bucket dimensions**

W 84" (2.13m), L 86" (2.18m),

H 42" (1.06m)


■ **transport dimensions**

W 99" (2.51m), L 234" (5.94m),

H 72" (1.82m), Clear. 10" (0.25m)

■ **hydraulic cylinder/dia.**

Gate 4", Bucket 3", Frame 4"

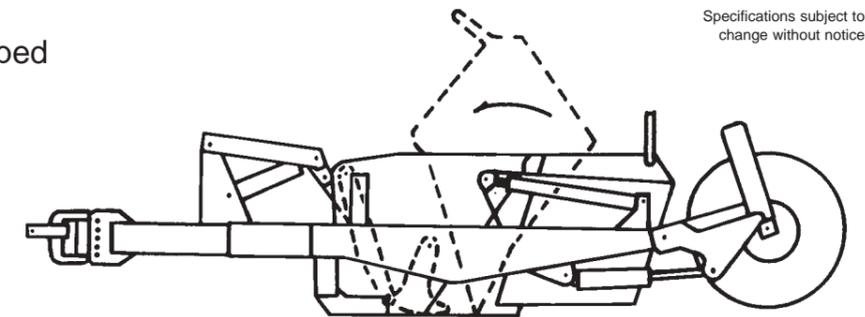

Specifications subject to change without notice

■ **tires** (4) 13.5 x 16.1
Diamond, 10 PR

■ **shipping weight est.**
6,800 lb (3090 kg)

Features

Height adjustable yoke hitch.

Greasable roller bearings.

Tandem hydraulics and hitch.

Options

Laser receiver mount bracket.

Drawbar assy. for the tractor.

Tractor requirements

■ **hydraulics**

optimum 25 GPM (100 l/min)

at 2500 PSI (175 bar)

■ **engine HP range**

one scraper: 130-150 HP

two scrapers: 150-180 HP



REYNOLDS INTERNATIONAL, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082 and (956) 630-5263